



BUL-788 CYBERVIEW SYSTEMS BULLET CAMERA


Specifications

Image Pickup Device	1/3" Sony Color CCD
Effective Pixels	512 (H) x 492 (V) NTSC
Video Output	1.0 V P-P/75Ω NTSC Composite
Resolution	420 TV Line 290K Pixels
Shutter Speed	1/60 ≈ 1/100,000 sec
Lens	6mm Fixed Board Lens
Iris Control	Electronic
Illumination/IR LED (#)	0.0 Lux @ F1.2/48 LED sensors
Gain Control	Auto
Back Light Comp.	Auto
White Balance	Auto
Gamma Correction	>0.45
Signal/Noise Ratio	>48dB
Operating Temp.	-20 to +50 degrees C
Power Source	DC12V @1000mA
Dimensions	3.07" (D) x 5.12" (L)
Weight (Lbs)	550/1.21

Product Features

- 48 IR Beads - 130' Effective Range
- Weather Proof - Indoor/Outdoor
- Standard 6mm Lens

Dimensions

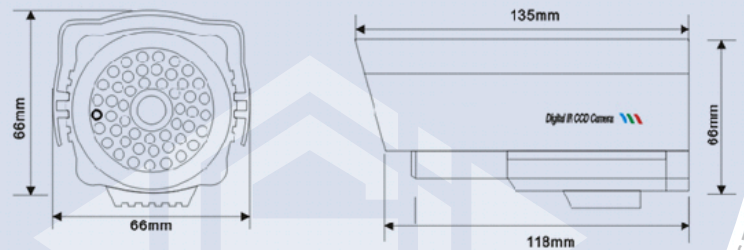

CyberView
Systems



CyberView
Systems

YOUR PEACE OF MIND STARTS HERE. YOUR PEACE OF MIND STARTS HERE. YOUR PEACE OF MIND STARTS HERE.